
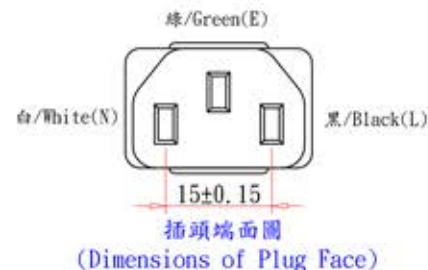




插頭部件 (Plug Component)			頭部削皮尺寸 (Plug strip dimension)			線材規格(Wire Spec.)	尾部削皮尺寸 (Terminal roj & Strip)			尾部處理 (Terminal Component)		
顏色(Color)	零件描述(Component)	數量(Q'ty)	內削(Strip)	外削(Roj)	顏色(Color)		外削(Roj)	內削(Strip)	顏色(Color)	顏色(Color)	零件描述(Component)	數量(Q'ty)
35P白色 90A±2A White	ME-301 (10A 125V-) (NEMA 5-15P)	1	5 ⁺¹ ₋₀	23±1	黑/Black(L)	SJT 18AWG/3C 105°C 白色(White) 線長: (Length) 3048 ^{+50.8} _{-12.7}	16±1	5 ⁺¹ ₋₀	黑/Black(L)	35P白色 90A±2A White	ME-302 (10A 125V-) (IEC 320 C-13)	1
鍍鎳 Nickel-Plated	Ø4.75 圓管端子 (Earth Pin Terminal)	1	5 ⁺¹ ₋₀	23±1	白/White(N)		16±1	5 ⁺¹ ₋₀	白/White(N)	銅本色 (Copper)	電腦電源線端子 CEM-08745BS-0 Computer power cord terminals	3
鍍鎳 Nickel-Plated	6.3×1.5 單片圓頭端子 (Solid Blades)	2	5 ⁺¹ ₋₀	23±1	綠/Green(E)		16±1	5 ⁺¹ ₋₀	綠/Green(E)	白色(White)	ME-302兩件式內模 (ME-302 Inner Body)	1
白色(White)	301單件式內模 (301 Inner Body)	1										

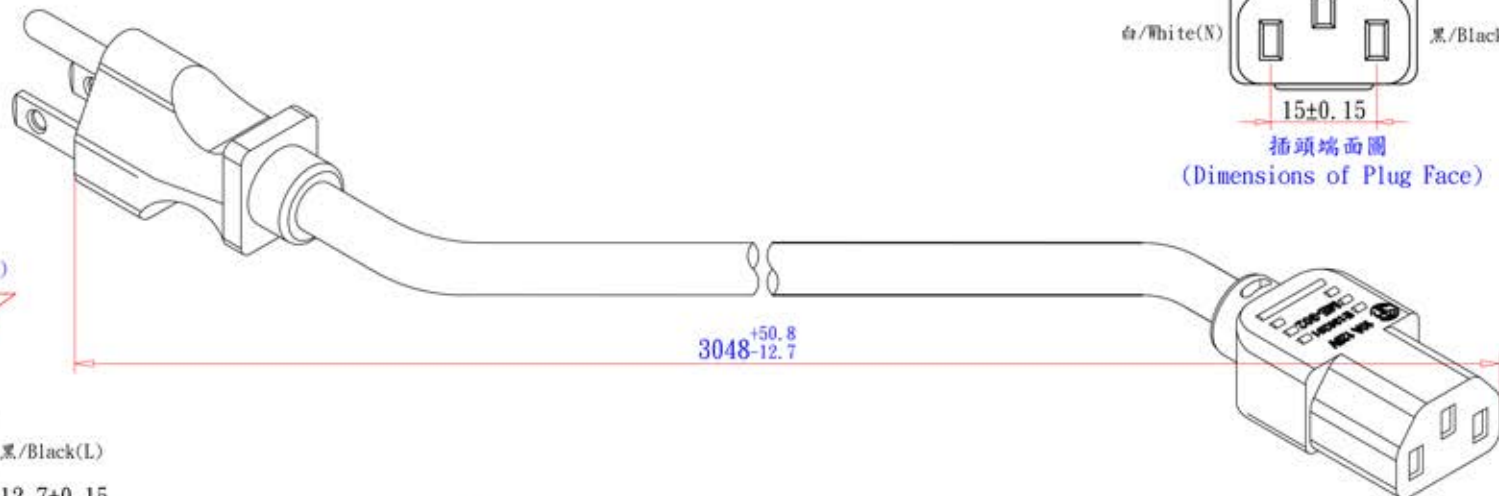

Insulation Thickness 0.76 mm
Overall Diameter 2.7±0.10 mm

Copper Conductor
41/0.160±0.004 mm
Resistance 22.4
(20°C Max). ohms/km)

Jacket Thickness 0.76 mm
Overall Diameter 7.8±0.15 mm



包裝方式(Packing)

扎線方式 (Bulk Pack)	每 10 條一扎 Per 10 pcs/Ties
紙箱尺寸 (Carton Size)	480 X 320 X 250
包裝數量 (Packing Qty)	PCS
標籤 (Label)	UL Detachable Label

正側事項 (Carton Print)	依客戶要求印刷 (See Purchase Order)	1. 高壓測試: 1500V/1Sec <3mA (Hi-Pot Test: 1500v/1Sec <3mA)
------------------------	---------------------------------	--

電線印字內容 Wire Printed	使用 充實 線材 凹印字 (In-Filler, Gravure)	紙箱事項標記 Shipping Mark
E322763 (UL) SJT 18AWG(0.824mm ²)x3C VW-1 105°C 300V /JT c(UL) SJT 18AWG(0.824mm ²)x3C FT2 105°C 300V -LF-		CnC
(UL) SJT 18AWG(0.824mm ²)x3C VW-1 105°C 300V E77975 WONDERFUL-D CSA SJT 18AWG(0.824mm ²)x3C FT2 105°C 300V LL43774 -F- -LF-		

SIZE:	A4
UNIT:	mm
SCALE:	1:1
PROJ.	

SIGNATURE	NAME	DATE			
APPROVED					
M.F.G. CHECKED			2011 1121	新版發行	楊承正
Q.A. CHECKED			REV	DATE	DESCRIPTION
DRAWN	楊承正	2011.11.21	PART No.	800-18-13D-WH-0010F	
CUSTOMER			DWG No.		
CnC Tech, LLC Industrial Cable and Connector Technology					