


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00133	Connector, dc plug, 5.5x2.1xL18.5 mm, molding style, spring contacts	1	
2	30-00415	Wire, 2C TS, 18 AWG, UL2468, 300V, 80°C, 4.4 mm, VW-1, PVC, 87A, red and black	1	
3	24-00006	Overmold, PVC, black	1	

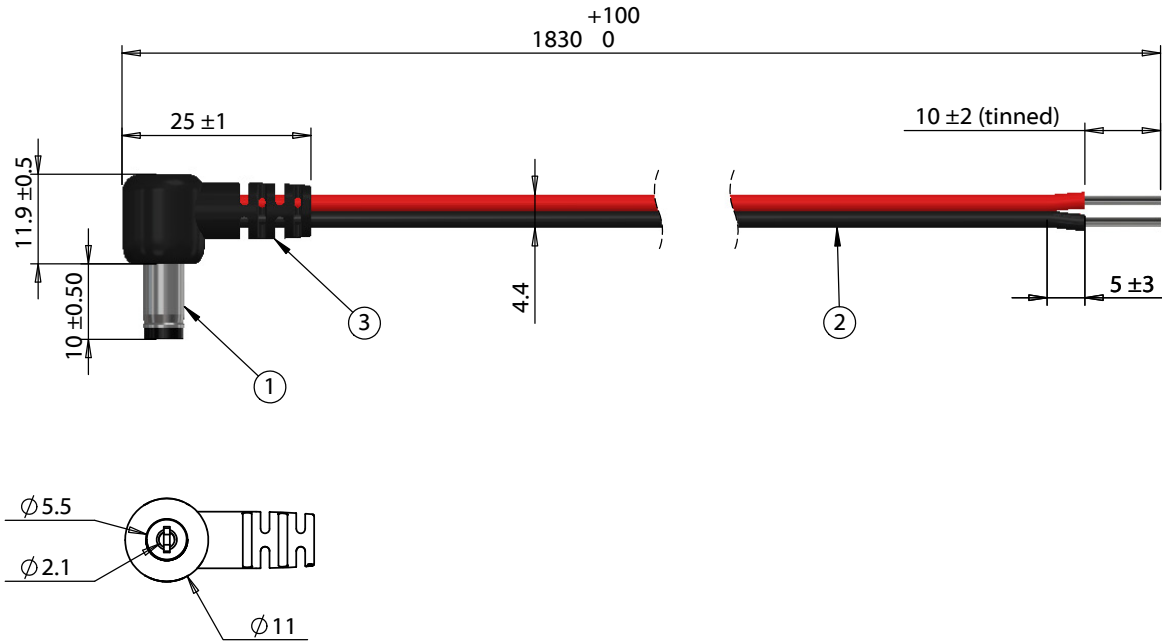

Wiring diagram	
50-00133	Wire color
Center	Red
Sleeve	Black

REVISION	DATE	DESCRIPTION	PREPARED:	NOTES	<h1>TENSILITY</h1> <p>20802 Sockeye Place #130 Bend, OR 97701 USA tel 541.323.3228 fax 541.323.4202 800 877.670.7118 www.tensility.com</p>							
A	7/25/2014	Initial release		Rated for 7 A, 12 Vdc				RoHS and REACH compliant Function test: no open, no reversed polarity, no short circuit, no INT Functionally equivalent components may be used	<table border="1"> <tr> <th>SIZE</th> <th colspan="2">PART NUMBER</th> </tr> <tr> <td>A</td> <td colspan="2">10-01780</td> </tr> </table>	SIZE	PART NUMBER	
SIZE	PART NUMBER											
A	10-01780											
A1	4/30/2015	updated notes section	VERIFIED:		DESCRIPTION: Cable, 1830 mm, 5.5x2.1x10 mm 90° 50-00133 dc plug to 10 mm tinned, 18 AWG, 30-00415 R-B wire	<table border="1"> <tr> <th>SCALE: 1:2</th> <th>WEIGHT:</th> <th>SHEET 1 OF 1</th> </tr> </table>	SCALE: 1:2	WEIGHT:	SHEET 1 OF 1			
SCALE: 1:2	WEIGHT:	SHEET 1 OF 1										