


PIN ASSIGNMENT			
P1		P2	
1	GND	1	
2		2	
3		3	
4	GND	4	
5		5	
6		6	
7	GND	7	

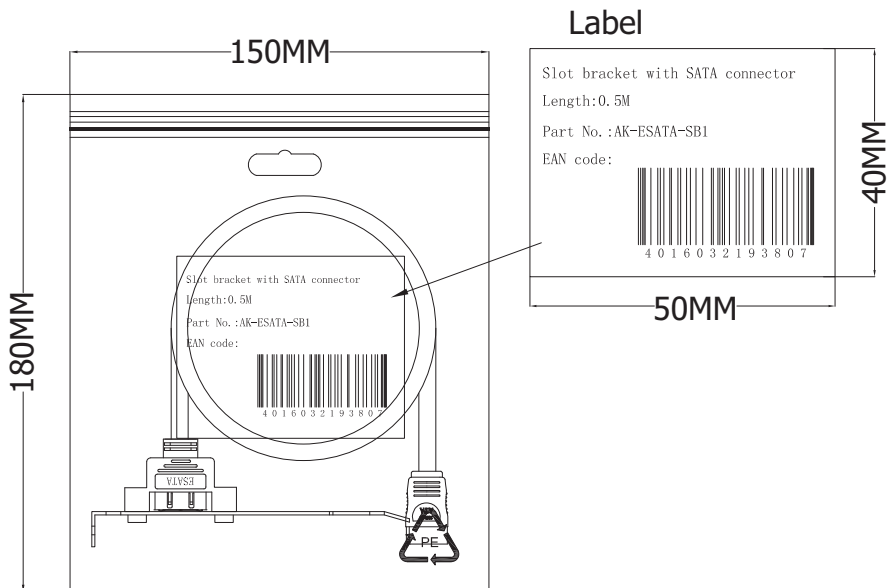

**Material:**

- Cable: UL2725 [26AWG(1/0.404)\*2+D(1/0.32)\*2+AL]\*2F
  - OD 2.2\*7.8MM
  - Jacket Red (200C/RD-16#)
- P1 Connector: eSATA 7P/M Solder Type
  - Pin G/F
  - Insulator Black Metal
  - Shell Plate Nickel
- P2 Connector: Serial ATA Female 7Pin
  - Pin G/F
  - Crimp type connector
  - Insulator Black
- Screw: M3.0\*10MM (M3.0 screwcap)

**Electrical:**

- 100% Open Short & Miswire Test
- Conductive Resistance: 2Ω (Max.)
- Insulation Resistance: 5MΩ (Min.)
- Hi-Pat Test 300V DC

⊕ = Assmann logo



<b>ITEM NO.</b>	<b>AK-ESATA-SB1-R</b>
<b>TITLE</b>	Slotbracket with External Serial ATA(eSATA) Single connector

**ASSMANN**  
Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283  
Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED  
©Copyright 2009 by Assmann Electronic Components  
All International Rights Reserved